


DuraTherm installed just below asphalt surface

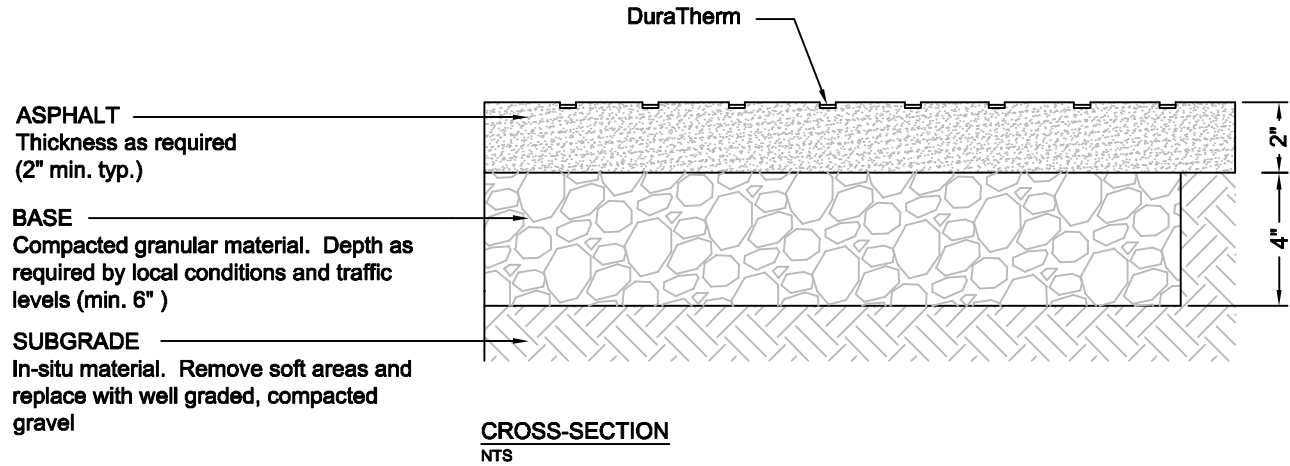

NOTE:
These are typical details only - actual pavement layer thickness should be properly designed by a qualified professional

Drawing No. DT-105

TYPICAL PAVEMENT WITH DURATHERM CROSS-SECTION DETAIL
Good Subgrade Support
Characterized by Firm to Hard Soils



FLINT TRADING, INC.
336-475-6600 | www.flintrading.com